


Ametek Powervar Line Conditioner



The Powervar Line Conditioner keeps your MicroMarket up and running by protecting your 365 Payment Center from power spikes and electrical interference. Powervar power conditioners combine surge diversion and noise filtering to ensure your MicroMarket stays online, processing transactions and serving customers.

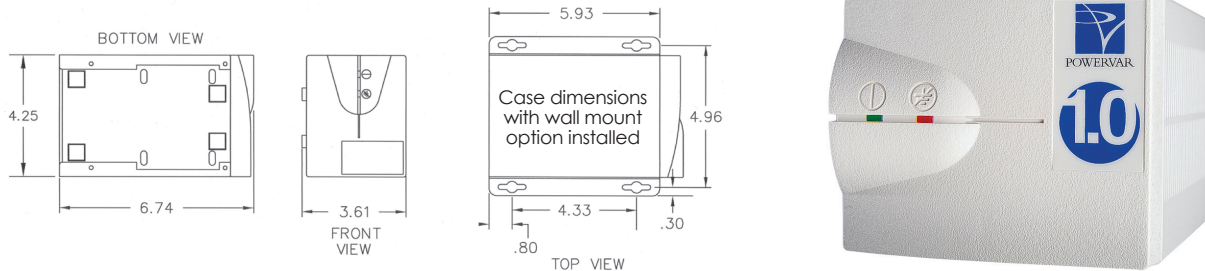


Specifications

	ABC150-11 Part #61018-XXR
VA Rating	180
Frequency	60 Hz.
BTU/Hr. Output	61
T.H.D. % Added	<1%
Load Surge Current @	
1/2 cycle	28 amps
1 second	10 amps
10 seconds	4.5 amps
Input Voltage	120
Output Voltage	120
Output Current	1.5 amps
Efficiency	90%
Voltage Drop No Load to Full Load	10%
Wall Mountable*	Yes
Compliance	UL, cUL, RoHS
Shipping Weight (lbs.)	6

Option 1: Standard Plugs/Receptacles

-01 - 5-15P plug and one 5-15R duplex
-21 - 5-15P plug and one 5-15R duplex with wallmount



NOISE REJECTION-ISOLATION: With unit under power and an ANSI/IEEE C62.41 Cat. A pulse applied either normal or common mode at the in-put, the noise output voltage will be less than 10V normal mode and less than 0.5V common mode in all four quadrants (CM-NM, NM-NM, CM-CM, NM-CM).

SURGE VOLTAGE WITHSTAND CAPABILITY: Tested under power to ANSI/IEEE C62.41 Cat. A & B (formerly IEEE587-1980). Cat. A - 6000V @ 200 amps, 0.5 usec risetime, 100 kHz decay, Cat. B - 6000V @ 500 amps, 0.5 usec risetime, 100 kHz decay.

Warranty/Support: POWERVAR warrants its power conditioners to be free from defects in materials and workmanship for a period of five years from the date of shipment. For North American service or support on any POWERVAR product, please contact POWERVAR Technical Support at (800) 369-7179 (in Illinois call (847-596-7000)). For service and support in EMEA, contact POWERVAR, Ltd. in the United Kingdom at +44 (0) 1793 553980. Or visit the POWERVAR website at www.powervar.com.

365 Retail Markets

1743 Maplelawn | Troy, MI 48084 | www.365retailmarkets.com | 888.365.7382