




PicoVend Mini

Unit Dimension	3.34646"(L)x 2.44094"(W)x 4.17323"(H)
-----------------------	---------------------------------------

Standards	
Chip Card	EMV Contact L1 v4.3 certified
Contactless Card	EMV Contactless L1 v2.6 certified

Functions	
DEX & MDB Compatibility	Allows full compatibility with major vending manufacturers
Memory	
MCU Processor	ARM A7 Quad-Core 1.1GHz Processor 32-bit 133MHz Secure Processor
Memory Flash/RAM	8GB Flash / 1GB RAM
OS	Android v7.x
Display	3.5" 320x 480 Pixels Color TFT LCD Capacitive Touch Screen
Keypad	Virtual Keypad (Support PIN on Touch)
Wire	
Ethernet	Connector RJ45
USB OTG x 1	Connector USB-C
RS232 x 3	Connector RJ45 for DEX cable (Audio Jack Connector)
Wireless	
4G LTE	Band 1,3,8,18,19,26 (Meets AT&T standard)
Bluetooth	Bluetooth 4.0
Audio	Speaker
Power	NAMA Compliance 9V~48V wider range power input

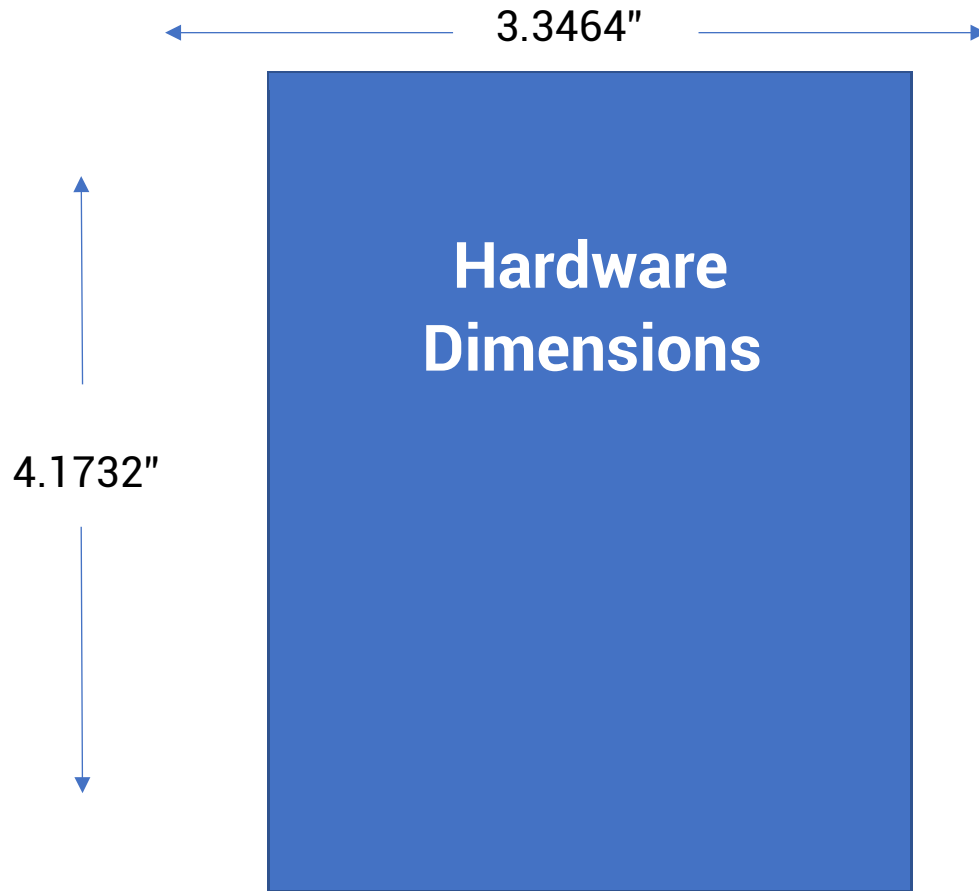

Contact us for more information. We are here for you.

1743 Maplelawn | Troy, MI 48084 | www.365retailmarkets.com | 888.365.7382