


Test Peripherals on V5 Kiosk

The Tech will need to bring a keyboard on-site.

1. Connect a USB keyboard to the kiosk. Tap the screen with your finger.
2. On your keyboard, press **Alt** and **F4** simultaneously to close the Point Of Sale software. The desktop will display.



3. Double-tap the **Setup** shortcut on the desktop.

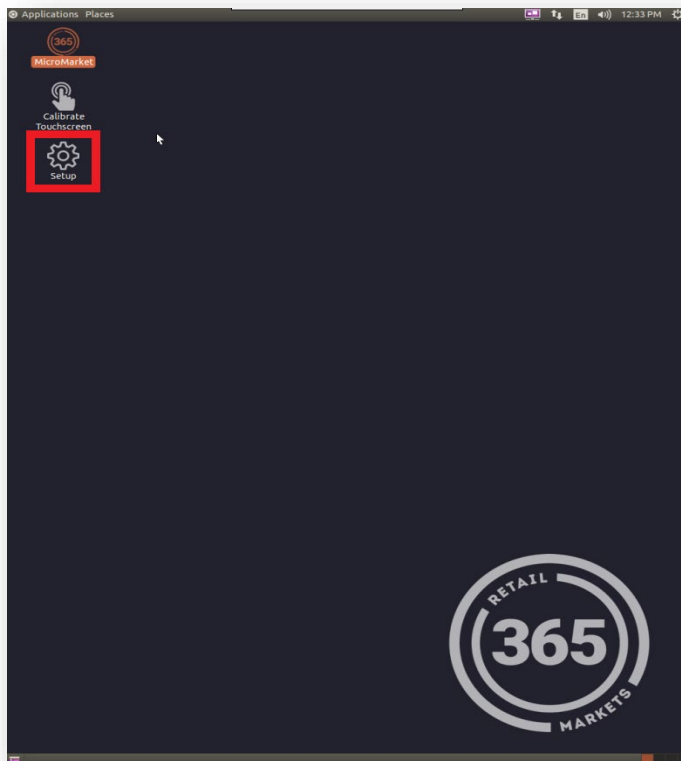

Test Peripherals on V5 Kiosk



4. Tap the **Test Devices** button.

Kiosk is Ready for Production
Press Start Kiosk to complete this setup. v0.1.154

Kiosk Information	Devices
Type: Gen3-C	Bill Acceptor <input type="button" value="TEST"/>
Name: VSH600507	Printer <input type="button" value="TEST"/>
Organization: CanteenAustin	Fingerprint Reader <input type="button" value="TEST"/>
Location: Plaza 7000	Barcode Scanner <input type="button" value="TEST"/>
IP Address: 172.25.85.106	Card Reader <input type="button" value="TEST"/>
Environment: N/A	Monnit Sensor <input type="button" value="TEST"/>
	Touchscreen <input type="button" value="TEST"/>

5. All devices will be checked by default. Uncheck all except for **Printer**, **Barcode Scanner**, and **Fingerprint Reader**. The bill acceptor will be checked using another method after you verify that the above devices are functioning properly.


Device Setup
Connected devices are automatically checked.

Devices to Test


<input checked="" type="checkbox"/> Card Reader	<input checked="" type="checkbox"/> Printer
<input checked="" type="checkbox"/> Bill Acceptor	<input checked="" type="checkbox"/> Fingerprint Reader
<input checked="" type="checkbox"/> Barcode Scanner	<input checked="" type="checkbox"/> Monnit Sensor
<input checked="" type="checkbox"/> Touchscreen	

Test Peripherals on V5 Kiosk

6. You will be prompted to scan a barcode. Scan any item to verify that the scanner is functioning properly.

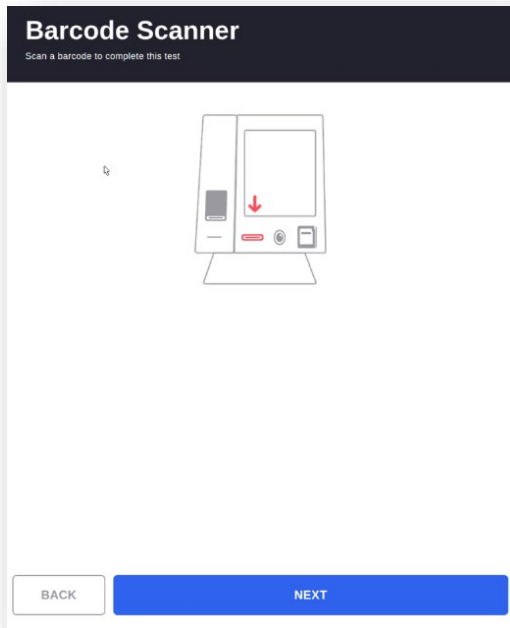


7. If successful, you will receive a success message. If successful, click the **NEXT** button.

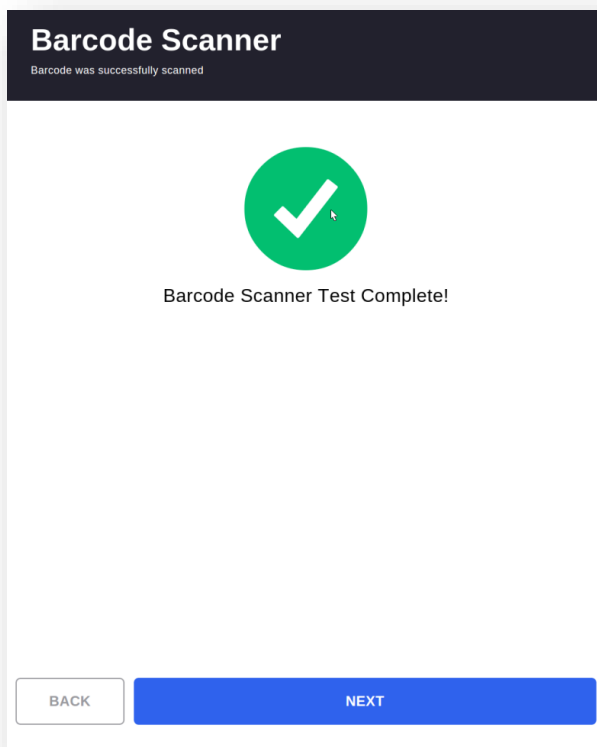


Test Peripherals on V5 Kiosk



8. The next device to be tested will display. Follow the steps on the screen. If successful, click the **Next** button.

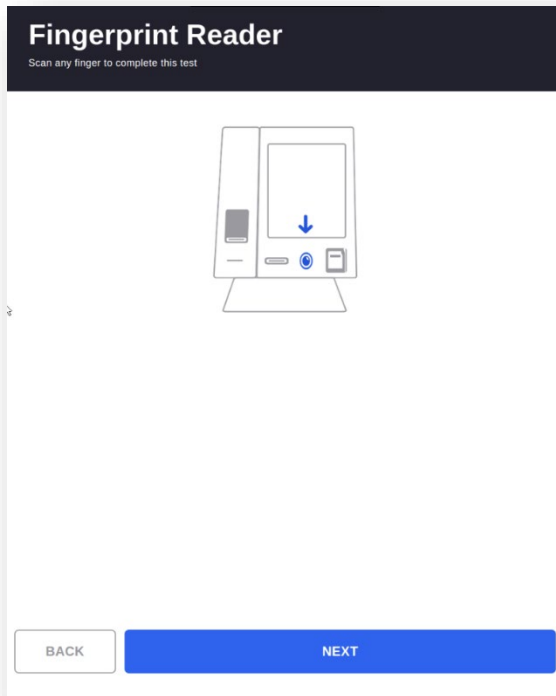


9. Follow the steps on the screen for each device. If successful, click the **Next** button.

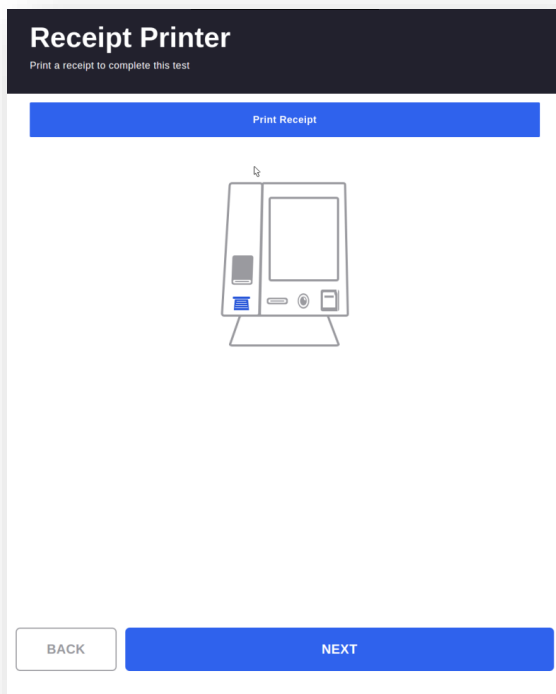

Test Peripherals on V5 Kiosk

10. The main Setup screen will display again. Click **Start Kiosk** to load the Point Of Sale software.

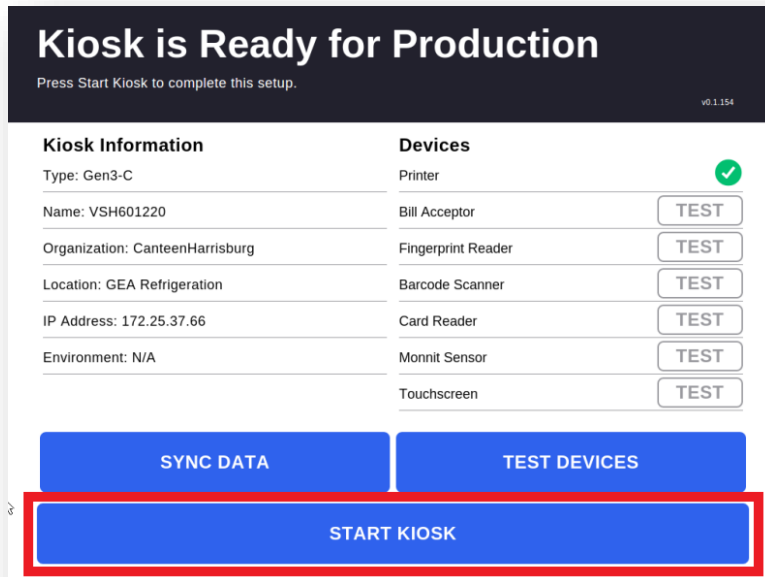

11. When the Point Of Sale software loads again, either create an account or use an existing account and attempt to fund the account with cash. Verify that the bill acceptor is working.