



PicoVend Spec Sheet




Unit Dimension	195mm(L)x109mm(W)x65mm(H)
-----------------------	---------------------------

Standards	
PIN Pad	PCI PTS v5.x certified (SRED included)
Chip Card	EMV Contact L1 v4.3 certified
Contactless Card	EMV Contactless L1 v2.6 certified

Functions	
DEX & MDB Compatibility	Allows full compatibility with major vending manufacturers
MCU/Memory	
MCU	ARM A7 Quad-Core 1.1GHz Processor 32-bit 133MHz Secure Processor
Memory	8GB Flash / 1GB RAM
MicroSD Socket:	1
OS	Android v7.x
Display	5" TFT Color Display (1280x720 Pixels), Capacitive Touch screen, Minimum Brightness: 450 Nits
Keypad	Virtual Keypad (Support PIN on Touch)
Wire	
Ethernet	Connector RJ45
USB OTG x 1	Connector USB-C
RS232 x 1	Connector RJ45 for DEX cable (Audio Jack Connector)
Wireless	
4G LTE	Band 1,3,8,18,19,26 (Meet AT&T standard)
Wi-Fi	802.11 a/b/g/n
Bluetooth	Bluetooth 3.0
Audio	Speaker, 4 pole audio jack Microphone
Camera	Front 5 Megapixel
Professional Barcode	300K pixel FF camera lens Support a red light beam and project red aiming spot
Power	NAMA Compliance, 9~60V wider range power input

Contact us for more information. We are here for you.

1743 Maplelawn | Troy, MI 48084 | www.365retailmarkets.com | 888.365.7382

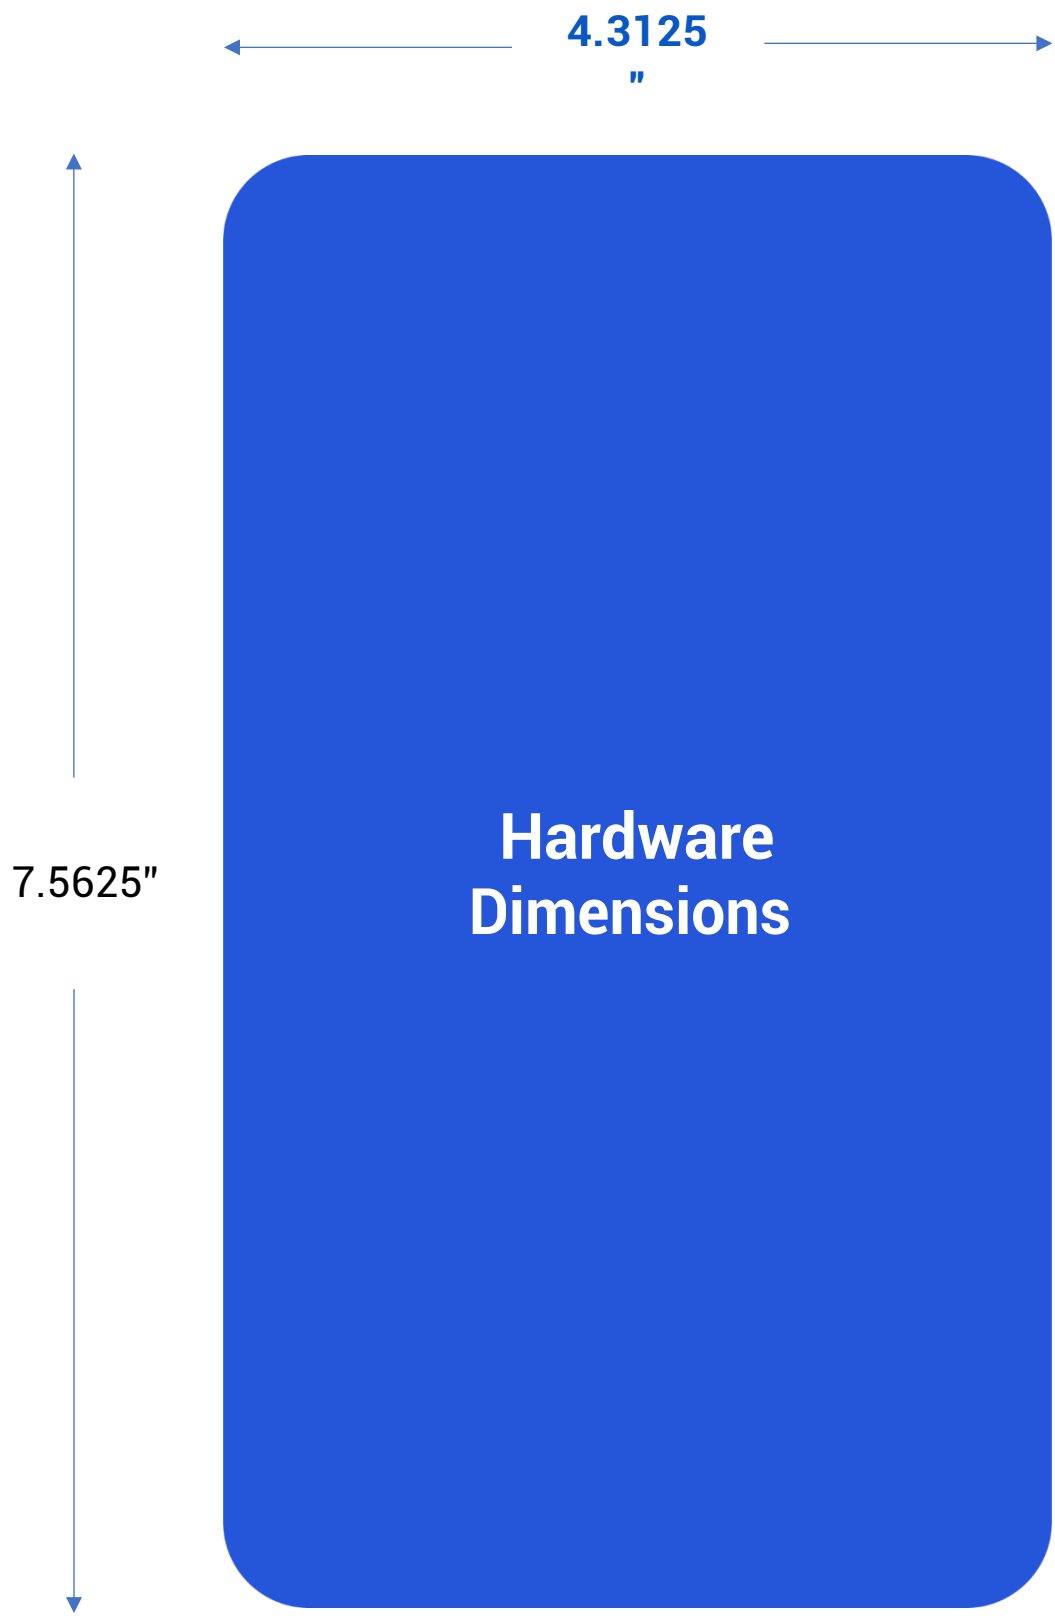

Contact us for more information. We are here for you.

1743 Maplelawn | Troy, MI 48084 | www.365retailmarkets.com | 888.365.7382