


Ametek Powervar UPS Line Conditioner

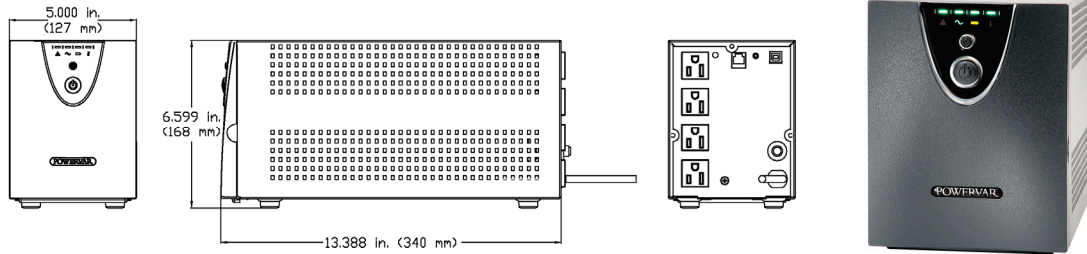

Specifications

	ABCEG251-11 52021-01GR
Type	GTS
Power Rating VA/Watts	250/200
Inverter Waveform	Low distortion sine wave
Transfer Time	7 ms. Typical
Frequency	60 Hz.
BTU/Hr.	120
T.H.D. Max. w/ 100% Resistive Load	<4% on battery
On Line Efficiency w/o Charger	86%
Input Voltage	120
Input Current	2.4 amps
Output Voltage	120
Output Current VA/Watts	2.0 /1.6 amps
Input Voltage Range w/o Using Battery	85–156 volts
Output Regulation (mains)	± 10%
Output Regulation (on battery)	± 5%
Backup Time (full load)	>5 minutes
Communications Interface	RJ11, USB
Shipping Weight (lbs.)	23
Internal Batteries	<ul style="list-style-type: none"> • User hot-swappable (see instruction manual) • Type: 12 volt, 9AH • Quantity: 1 battery • Recharge time: 6 to 10 hours to 90%, 24 hours to full charge <p>* On a full charge battery, a Gen3 unit will run approx. 1 hr under power loss conditions</p>

Warranty/Support: POWERVAR warrants the electronics and transformers used in its uninterruptible power managers to be free from defects in materials and workman-ship for a period of five years from the date of shipment. Batteries are warranted for a period of two years from the date of shipment. For North American service or support on any POWERVAR product, please contact POWERVAR Technical Support at (800) 369-7179 (in Illinois call (847-596-7000)). For service and support in EMEA, contact POWERVAR, Ltd. in the United Kingdom at +44 (0) 1793 553980. Or visit the POWERVAR website at www.powervar.com.

Battery Life Disclaimer: Powervar's standard battery warranty applies only to UPS and UPM products which are continuously connected to AC mains power, except during utility power outages. Products which are regularly and intentionally disconnected from AC mains power will experience battery discharge/charge cycles potentially far more numerous than those for which the battery was designed. As a result, products used in such applications will experience substantially reduced battery life. For that reason, Powervar's standard battery warranty does not apply for applications in which the UPS or UPM product is regularly and intentionally disconnected from AC mains power. Powervar UPS and UPM products used in such applications shall receive a 90 day warranty on batteries.

365 Retail Markets

1743 Maplelawn | Troy, MI 48084 | www.365retailmarkets.com | 888.365.7382